



## Technical Specification

### Nortel IP Phone 1210

Ideal for light call activity in lobbies and common areas

*The IP Phone 1210 is a single-line, standard-level desktop phone in the exciting IP Phone 1200 Series. Originally designed and optimized for small and medium-sized businesses, the IP Phone 1200 Series is now extended to enterprises, offering a competitive feature set with contemporary styling. The IP Phone 1210 is a great choice for lobbies, lunch rooms or other common areas.*

#### Key features and benefits include:


- Single line IP Phone supports up to eight fixed telephony keys, four context-sensitive soft keys and two shortcut/feature keys.
- 3 lines x 24 character and 143 x 32 pixel display with anti-glare screen combined with a flexible two-position adjustable footstand, optimizes viewing under varied lighting conditions.
- Four-way navigation cluster with Enter key maximizes user choice and flexibility in navigation.
- Superior audio quality leverages some of the latest technologies to ensure crystal-clear conversations.

- Integrated headset and speakerphone — supports a high-quality, two-way speakerphone (handsfree) and other optional headsets for executives or multi-tasking workers.
- Simplified communications — the most commonly used Nortel Business Communications Manager (BCM) and Nortel Communication Server 1000 features come pre-programmed on all IP Phone 1200 Series sets. You can also customize the sets from hundreds of BCM and Communication Server 1000 telephony features.

- Integrated 10/100 Base-T Ethernet switch with LAN and PC ports reduces costs, enabling a single cable drop to support both the phone and a collocated PC.
- Supports 802.3af standards-based PoE and local AC power via power adapter.



**Nortel IP Phone 1210**

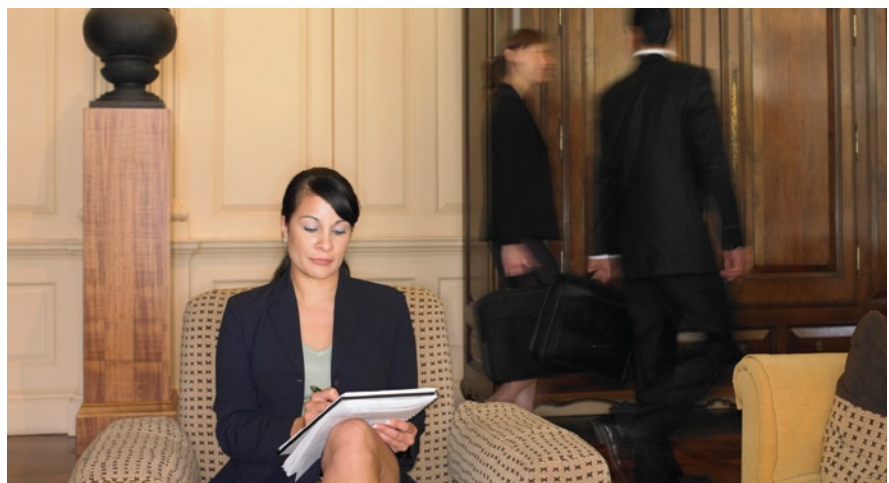

## Technical specifications

### Physical specifications

#### Platform support

- Communication Server 1000
- Business Communications Manager 50

#### Display

- Monochrome Film Super Twist Nematic (FSTN) Liquid Crystal Display, 3 line x 24 character with anti-glare coating

#### IP Phone footstand adjustments

- Desktop viewing adjustments: 25 and 55 degree angles
- Wall mount adjustment: minus 5 degrees

#### Fixed and soft-label keys

- Ten fixed keys (Handsfree, Headset, Volume Up and Down, Mute, Hold, Goodbye, Applications, Services and Conference)
- Four context-sensitive soft-label keys for easy-to-use navigation\*\*

#### Navigation cluster

- Four-way navigation cluster (left, right, up, down arrows) plus Enter key

#### User Selectable Ringtones

#### Headset support

- Supports third-party wired headsets

#### Languages supported

- Languages are platform and protocol dependent. Consult platform documentation of choice for further details.

#### Color

- Charcoal

#### Connectivity/data rates

- Integrated 10/100 Ethernet Switch
- Two 10/100 Ethernet ports for network connection and collocated PC connection
- Auto speed and duplex
- Manually configurable speed and duplex when used with Ethernet switches that do not auto-sense
- Auto MDIX on network port
- Ability to manually disable PC port

#### Dimensions

- Unpackaged: (H x W x D) 205 x 198 x 190 mm (8.1 x 7.8 x 7.5 inches) approximate, in desktop 55-degree position
- Packaged: (H x W x D) 254 x 260 x 111 mm (10 x 10.25 x 4.75 inches), approximate

#### Weight

- Packaged: 2.9 lb / 1.32 kg
- Unpackaged: 1.9 lb / .86 kg

#### Power

- Power over Ethernet: Supports IEEE 802.3af Power over Ethernet; Power Class 2
- AC power: Use Nortel approved adapter; 48VDC, 0.52A
- Power dissipation: 3.2 watts typical, 4.6 watts maximum

#### Protocols

- Nortel Communication Protocol

#### Audio Quality of Service

- G.711 a- and  $\mu$ -g-law, G.723.1 and G.729a and Annex B
- 802.1p/Q, DiffServ and VLAN tagging of telephony port traffic
- Supports echo cancellation and silence suppression

#### Operating temperature

- +5°C to 40°C/40°F to 104°

#### Relative humidity

- 5% to 95% (non-condensing)

#### Storage temperature

- -40°C to 70°C/-40°F to 158°F

#### Administration and security

- Static, Partial and Full Dynamic Host Control Protocol (DHCP) address assignment (Full DHCP factory default)
- 802.1ab Link Layer Discovery Protocol (LLDP) for network auto-discovery and inventory management
- 802.1x and Extensible Authentication Protocol (EAP-MD5) for network authentication and access control
- Signaling path encryption with support for 128-bit Advanced Encryption Standard (AES)\*
- Media path encryption with RFC 3711-compliant Secure Real-time Protocol (SRTP) pre-shared key and public key infrastructure\*\*\*
- Proactive Voice Quality Management (PVQM) for enhanced administration and diagnostics

### Regulatory and safety compliance

#### EMC

- United States: FCC 47 CFR Part 15 Class B
- Canada: ICES-003 Class B
- Australia/New Zealand: CISPR 22
- European community:
  - EN55022 Class B
  - EN 55024
  - EN 61000-3-2
  - EN 61000-3-3
- Japan: VCCI
- Korea MIC: KN22 and KN24

#### Safety

- United States: UL 60950-1
- Canada: CSA 60950-1-03
- Australia/New Zealand: AS/NZS 60950.1:2003
- European Community: EN 60950-1+A11
- International: IEC 60950-1
- Mexico: NOM approvals

#### Other

- FCC Part 68 HAC
- IC CS-03 HAC
- Australia AS/ACIF 004
- New Zealand PTC 220
- Complies with the essential requirements and other relevant provisions of Directive 1999/5/EC10
- Complies with Reduction of Hazardous Substances (RoHS) – (6 of 6) as part of European Union Environmental Directive
- American Disabilities Act (ADA) compliant dialpad

\* May require deployment of Secure Multimedia Controller 2450, which is Nortel Communication Server dependent. Consult Nortel server documentation of choice for requirement details.

\*\* Context-sensitive soft-label keys are Nortel Communication Server/minimum release dependent.

\*\*\* Public Key Infrastructure is Nortel Communication Server/minimum release dependent. Consult Nortel server documentation of choice for support details.

Nortel is a recognized leader in delivering communications capabilities that make the promise of Business Made Simple a reality for our customers. Our next-generation technologies, for both service provider and enterprise networks, support multimedia and business-critical applications. Nortel's technologies are designed to help eliminate today's barriers to efficiency, speed and performance by simplifying networks and connecting people to the information they need, when they need it. Nortel does business in more than 150 countries around the world. For more information, visit Nortel on the Web at [www.nortel.com](http://www.nortel.com). For the latest Nortel news, visit [www.nortel.com/news](http://www.nortel.com/news).

For more information, contact your Nortel representative, or call 1-800-4 NORTEL or 1-800-466-7835 from anywhere in North America.

Nortel, the Nortel logo, Nortel Business Made Simple and the Globemark are trademarks of Nortel Networks. All other trademarks are the property of their owners.

Copyright © 2008 Nortel Networks. All rights reserved. Information in this document is subject to change without notice. Nortel assumes no responsibility for any errors that may appear in this document.

NN123706-061108

#### In the United States:

Nortel  
35 Davis Drive  
Research Triangle Park, NC 27709 USA

#### In Canada:

Nortel  
195 The West Mall  
Toronto, Ontario M9C 5K1 Canada

#### In Caribbean and Latin America:

Nortel  
1500 Concorde Terrace  
Sunrise, FL 33323 USA

#### In Europe:

Nortel  
Maidenhead Office Park, Westacott Way  
Maidenhead Berkshire SL6 3QH, UK  
Phone: 00 800 8008 9009

#### In Asia:

Nortel  
United Square  
101 Thomson Road  
Singapore 307591  
Phone: (65) 6287 2877



**BUSINESS MADE SIMPLE**